


Product Specifications

Customer	
Model Name	NTWP101-1 V612E
Model Number	NTWP101 <u>XXXXXX</u> -SI <u>XXXXXX</u> - <u>XX</u> 02-612E *

* X = A-Z, 0-9 (Varies by options)

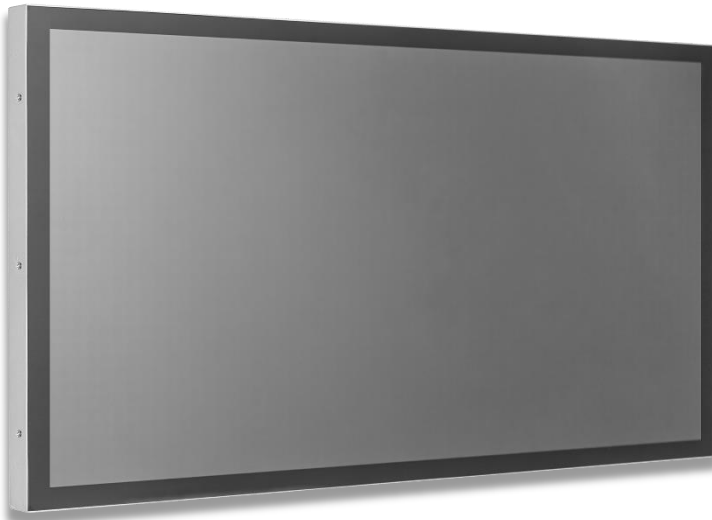

Records of Revision			
Vision	Modifying	Old Description	New Description
v2611.1	Initial release		

Key Features

- ★ 10.1 inch Industrial LCD Panel, 1280x800 Resolution
- ★ Wide viewing angle 178°/178°
- ★ Wide-temperature LCD panel, operating temperature -20-60°C
- ★ Intel® Alder Lake N95/N97 CPU
- ★ DDR4 8G RAM, Max to 16G
- ★ GbE LAN Port x2
- ★ 128G SSD, Max to 1T
- ★ HDMI Output x1, DP output x1
- ★ Realtek Audio HAD Codec,
- ★ USB 3.0 x4, USB 2.0 x2
- ★ Narrow-bezel true-flat PCAP touch screen
- ★ 7H Hardness tempered cover glass
- ★ 10-point multi-touch , supports Nextech stylus
- ★ Metal housing with multiple mounting options
- ★ Made in Taiwan, 3-year warranty, designed for harsh environments
- ★ Optional high brightness up to 1000nits for outdoor applications
- ★ Optional Privacy filter or antimicrobial surface treatment



Desktop Stand



Wall Mounting



Panel Mount

System Specifications

CPU	Intel® Alder Lake-N Processor
Memory	DDR4 SO-DIMM 8G, Max to 16G
Network	Intel i210-AT GbE Ethernet Controller x1 Intel i226-V GbE Ethernet Controller x1
Storage	M.2 M-Key 2280, PCIE X1/SATA, Support PCIE X1 NVMe/SATA SSD, Auto Detect SATA3.0 6Gbps
Sound Chip	Realtek Audio HAD Codec
Rear I/O	HDMI x1, DP x1 RJ45 LAN Ports x2 USB 3.0 x4, USB 2.0 x2 Line-Out + MIC 2in1 3.5mm Jack x1
Power Input	12VDC-in

Display Specifications

Screen Diagonal	10.1 inch	Response Time	29 msec.
Active Area	216.96x135.6 mm	Display Mode	Normally Black
Resolution	1280x800	Backlight Unit	White LED
Contrast Ratio	800:1	Viewing Angle (L/R, U/D)	178°/178° (CR≥10)
Display Ratio	16:10	Backlight Lifetime	>30,000 Hours
Colors	16.7M Colors	Operating Temp.	-20~60°C
Pixel Pitch	0.1695x0.1695 mm	Storage Temp.	-20~60°C

Brightness Options

Configuration	Brightness	Application	Ordering Information
Standard	500nits	General (Indoor)	NTWP101NXSXX-SIXXXXXX-XX02-612E
Optional	1000nits	Outdoor / Semi-outdoor	NTWP101HX2XX-SIXXXXXX-XX02-612E *

* Refer to datasheets: NTWP101-2

Touch Options

Configuration	Specification	Ordering Information
Standard	Projected Capacitive Touch	NTWP101X P XXX-SIXXXXXX-XX02-612E
Optional	No touch	NTWP101X 0 XXX-SIXXXXXX-XX02-612E

PCAP Touch Specifications

Allowed Touch Points	10 points	Thickness of Cover Lens	1.1±0.2mm
Transparency	≥87%	Hardness of Cover Lens	7H
Accuracy	99.00%	IK Ratings	IK07

Surface Treatment Options

Surface Treatment Options		
Configuration	Specification	Ordering Information
Standard	Glare Type	NTWP101XXX 00 -SIXXXXXX-XX02-612E
Optional	Anti-Glare & UV-resistant Coating	NTWP101XXX GG -SIXXXXXX-XX02-612E
Optional	Antibacterial (AB Film)	NTWP101XXX AB -SIXXXXXX-XX02-612E
Optional	Privacy filter (AS Film)	NTWP101XXX SF -SIXXXXXX-XX02-612E

System Options

CPU		
Configuration	Specification	Ordering Information
Standard	Alder Lake-N95	NTWP101XXXXX-SI 31 XXX-XX02-612E
Optional	Alder Lake-N97	NTWP101XXXXX-SI 51 XXX-XX02-612E

Memory		
Configuration	Specification	Ordering Information
Standard	DDR4 SO-DIMM 8G	NTWP101XXXXX-SIXX 8 XX-XX02-612E
Optional	DDR4 SO-DIMM 16G	NTWP101XXXXX-SIXX A XXX-XX02-612E

Storage		
Configuration	Specification	Ordering Information
Standard	SSD 128G	NTWP101XXXXX-SIXXX S1 -XX02-612E
Option 1	SSD 256G	NTWP101XXXXX-SIXXX S2 -XX02-612E
Option 2	SSD 512G	NTWP101XXXXX-SIXXX S3 -XX02-612E
Option 3	SSD 1TB	NTWP101XXXXX-SIXXX S4 -XX02-612E

Housing Options


Housing Material		
Configuration	Specification	Ordering Information
Standard	SECC	NTWP101XXXXX-SIXXXXXX- S X02-612E
Optional	Stainless Steel	NTWP101XXXXX-SIXXXXXX- L X02-612E
Optional	Aluminum	NTWP101XXXXX-SIXXXXXX- A X02-612E

Housing Color		
Configuration	Specification	Ordering Information
Standard	Silver	NTWP101XXXXX-SIXXXXXX- X S 02-612E
Optional	White	NTWP101XXXXX-SIXXXXXX- X W 02-612E
Optional	Black	NTWP101XXXXX-SIXXXXXX- X B 02-612E
Optional	Custom Color	NTWP101XXXXX-SIXXXXXX- X X 02-612E *

* **X** = A~Z, 0~9 (Varies by Color)

Nextech Stylus Option

Tip	Passive conductive metal mesh
Tip Diameter	6mm
Magnetic Attachment	Yes

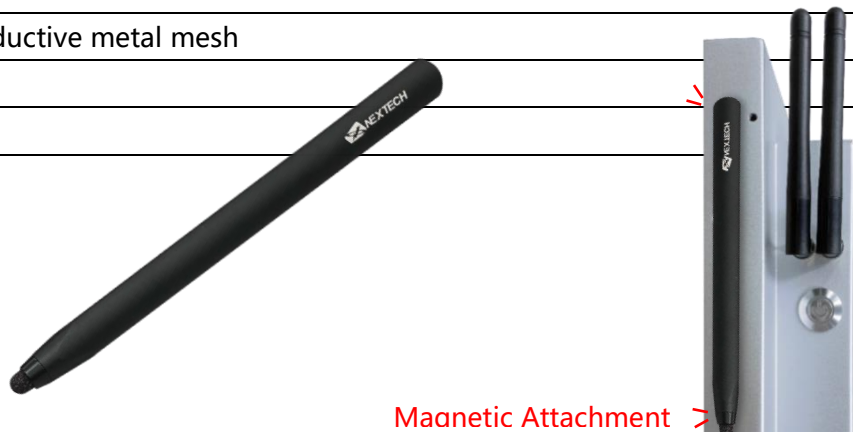

Magnetic Attachment >

Optional Mounting Accessories

	Accessories	Description
Optional	Desktop stand	For desktop use
Optional	Panel mount kit	For front mounting into kiosks, cabinets, or equipment panels.
Optional	Open-frame brackets	For rear mounting installation inside kiosks, cabinets, or equipment panels.
Optional	Wall Mount Bracket	For wall mounting

Desktop Stand Type L (Optional)




Item	L Stand	Model	DST-0B004/DST-1B004
VESA Mount	100x100 / 75x75 mm	Dimensions	194x194x222 mm
Material	SECC	Net Weight	1.4 kg
Tilt Angle	105°	Load Capacity	15 kg



Desktop Stand Type B (Optional)



Item	B Stand	Model	DST-0B002/DST-1B002
VESA Mount	100x100 / 75x75 mm	Dimensions	203x275x227 mm
Material	Steel/Plastic/Aluminum	Net Weight	1.8 kg
Tilt Angle	-2° ~ +180°	Load Capacity	15 kg

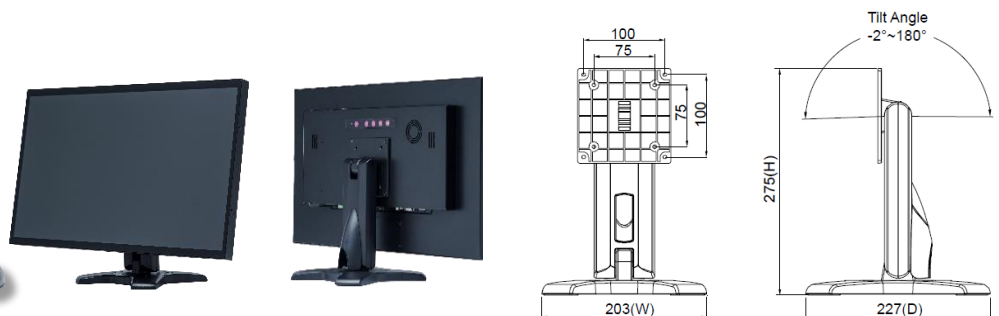


Nextech WP Series 10.1" Industrial All-in-one Touch PC

NTWP101-1 V612E

Panel Mount Kits (Option)




Panel Mount Installation Dimensions

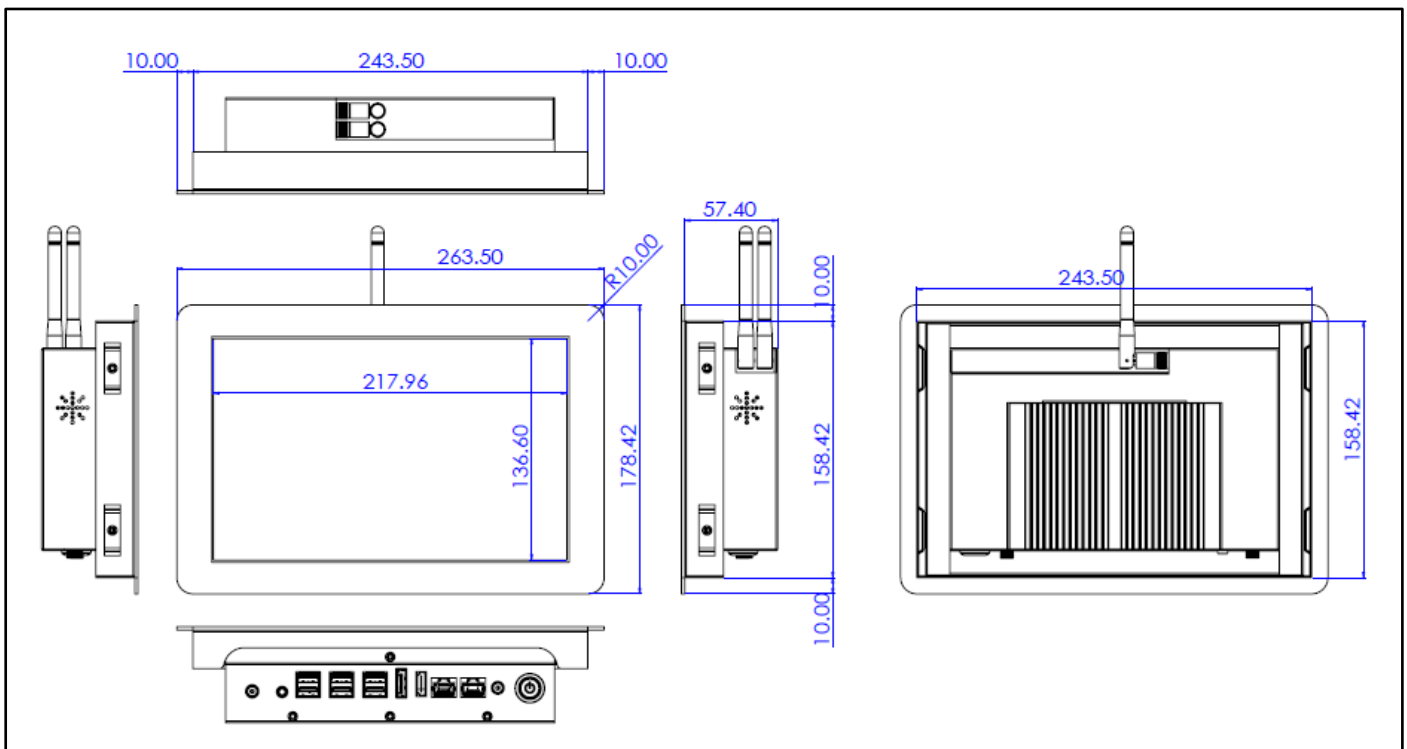


Nextech WP Series 10.1" Industrial All-in-one Touch PC

NTWP101-1 V612E

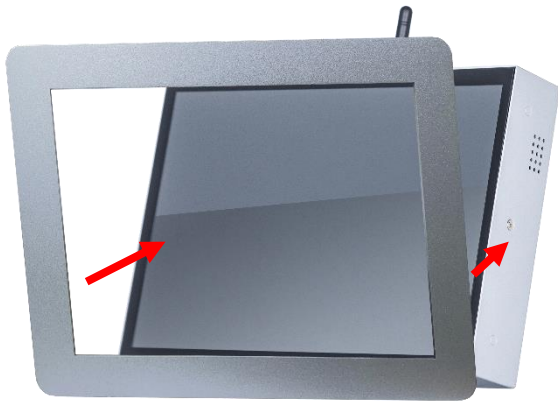


Step 1

Assemble the front module with the display unit.
(This step is pre-assembled at Nextech's factory.)

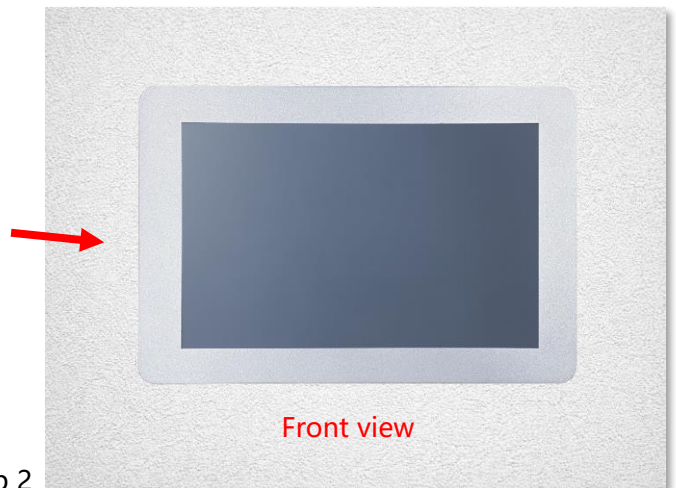


Step 2

Insert the display into the cut-out from the front.

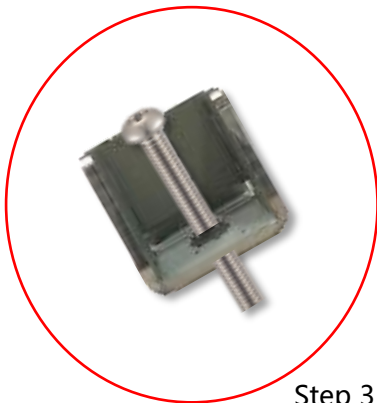


Step 3


Install the mounting clips from the rear side and secure them with screws.

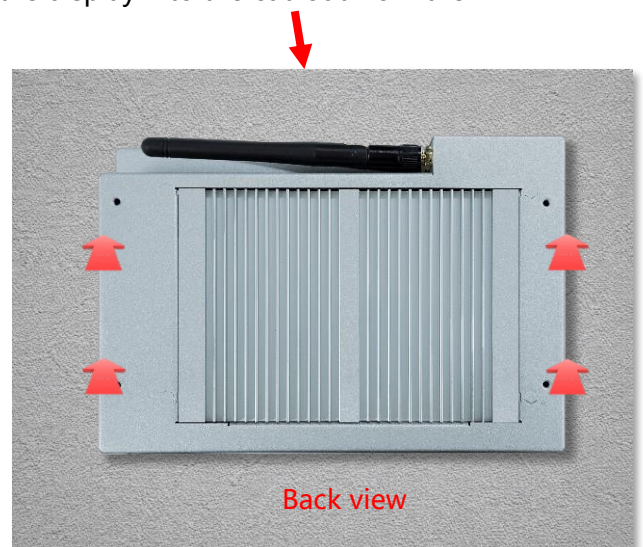

Wall Mount Bracket (Optional)

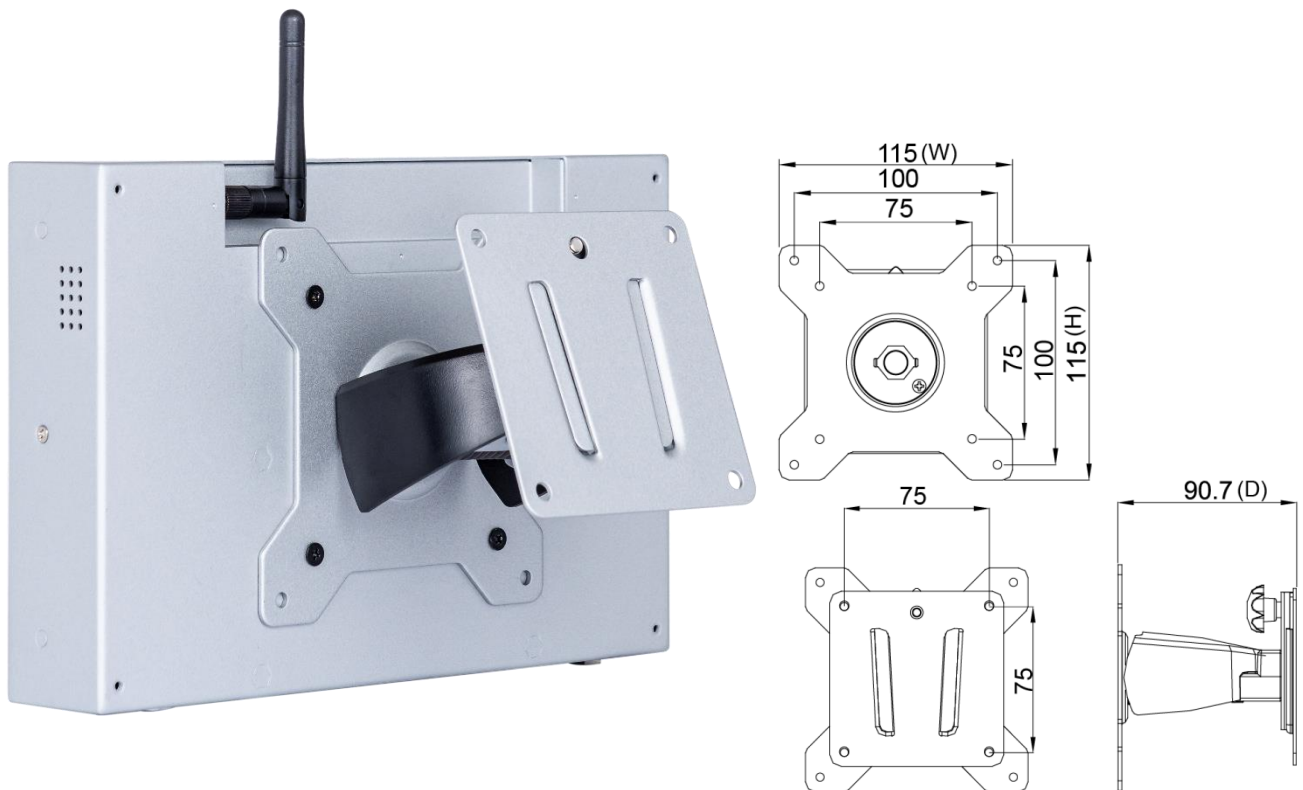


Packing Information

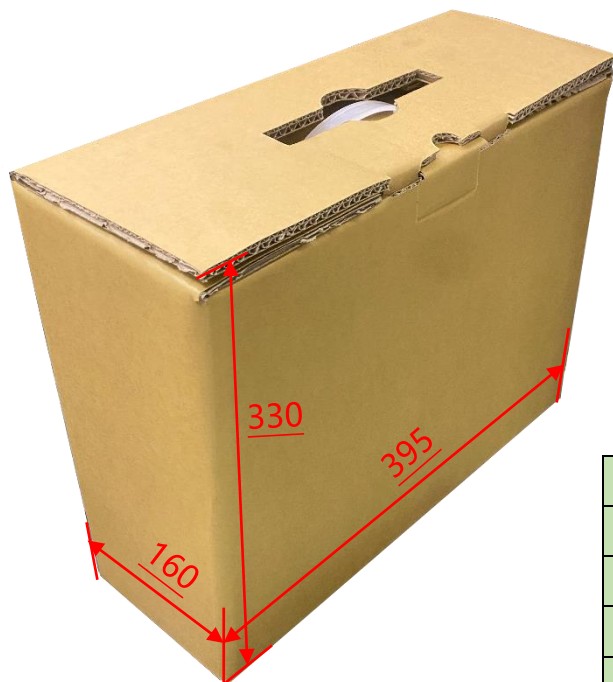


Carton Dimensions	395x160x330 mm
Net Weight	≤1.7 kg
Gross Weight	≤3.4 kg
Units per Pallet	72 units
Pallet Size	120x100x142 cm

Input /Output System

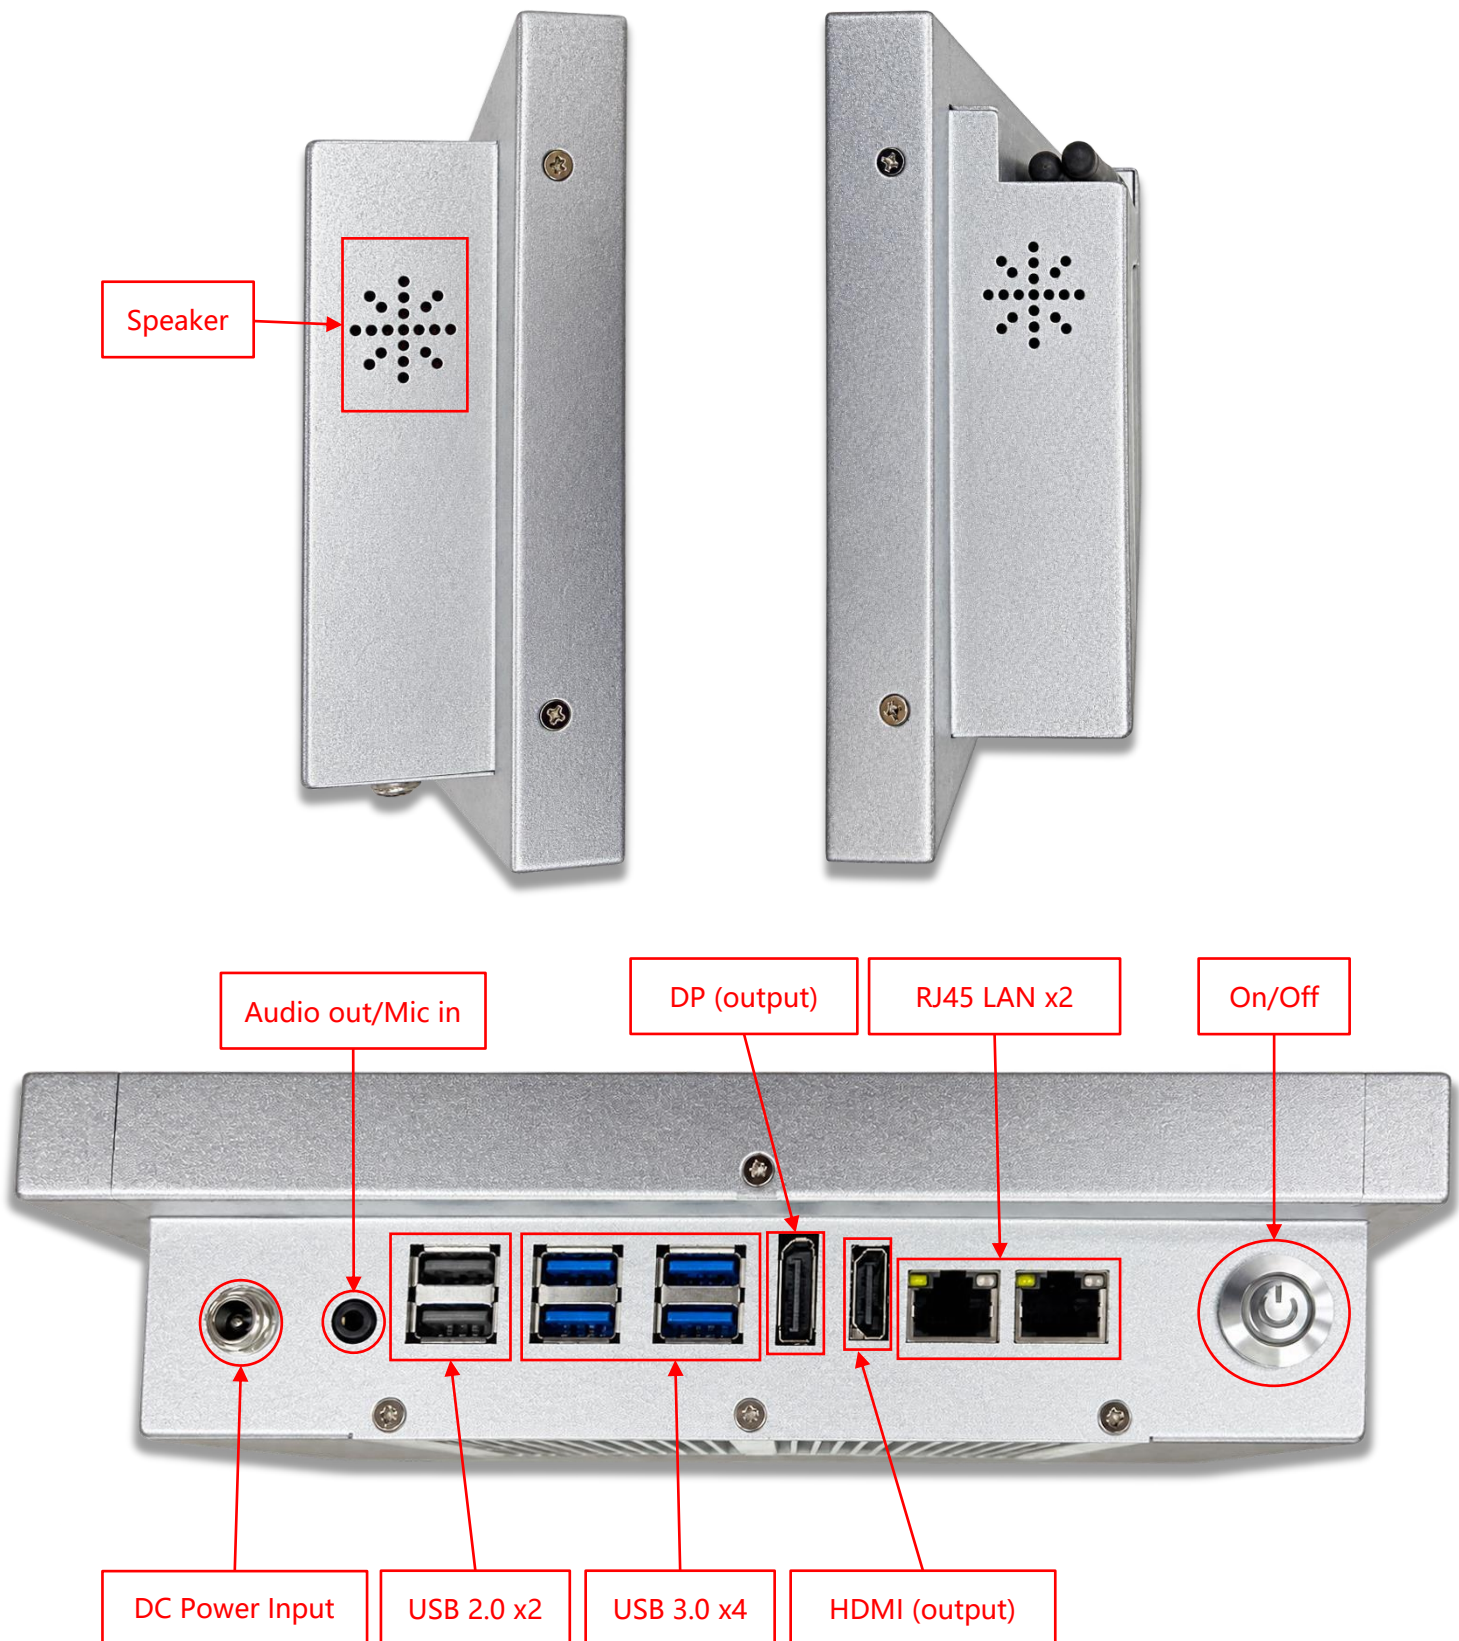



Nextech WP Series 10.1" Industrial All-in-one Touch PC

NTWP101-1 V612E

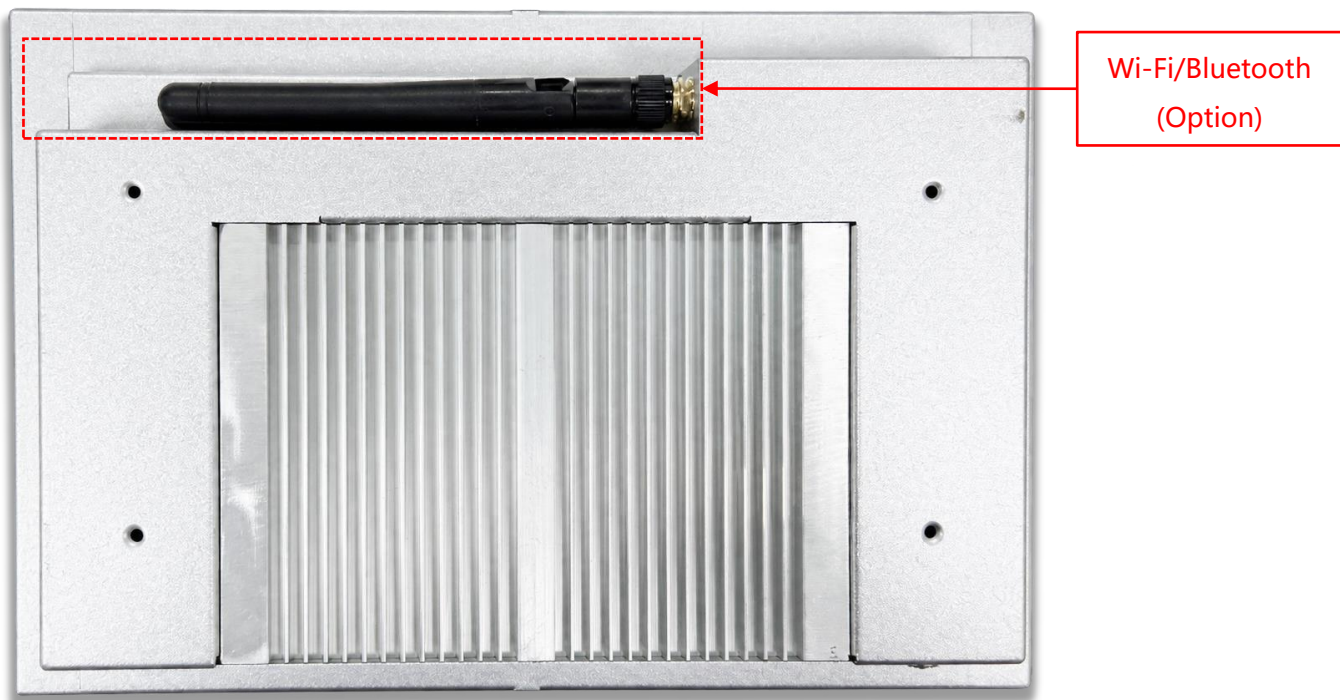



Input / Output	Connectors	Input / Output	Connectors
HDMI (Output)	1	Audio Output /Mic Input (3.5mm)	1
DP (Output)	1	Speakers	1W x2
USB 3.0	4	DC Power Input	1
USB 2.0	2	Wi-Fi/Bluetooth & Antenna	Optional
LAN (RJ45)	2		

Mounting Plate

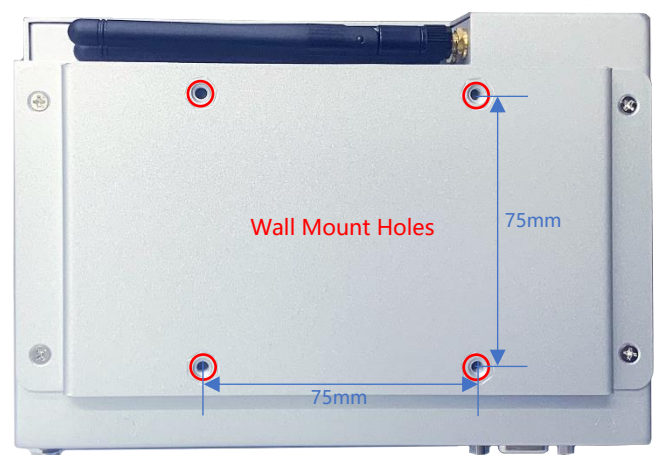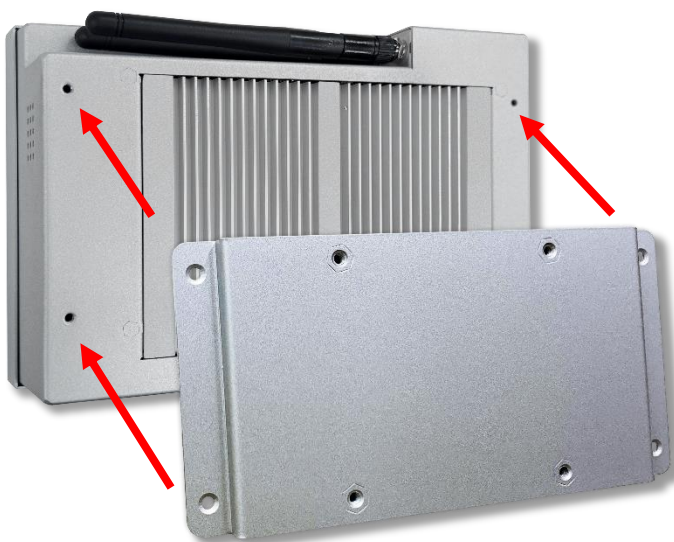

Physical Specifications

Dimensions (Max.)	233.1x155x56(±2)mm	Net Weight	≤1.7 kg
VESA Mount	75x75 mm	Gross Weight	≤3.4 kg

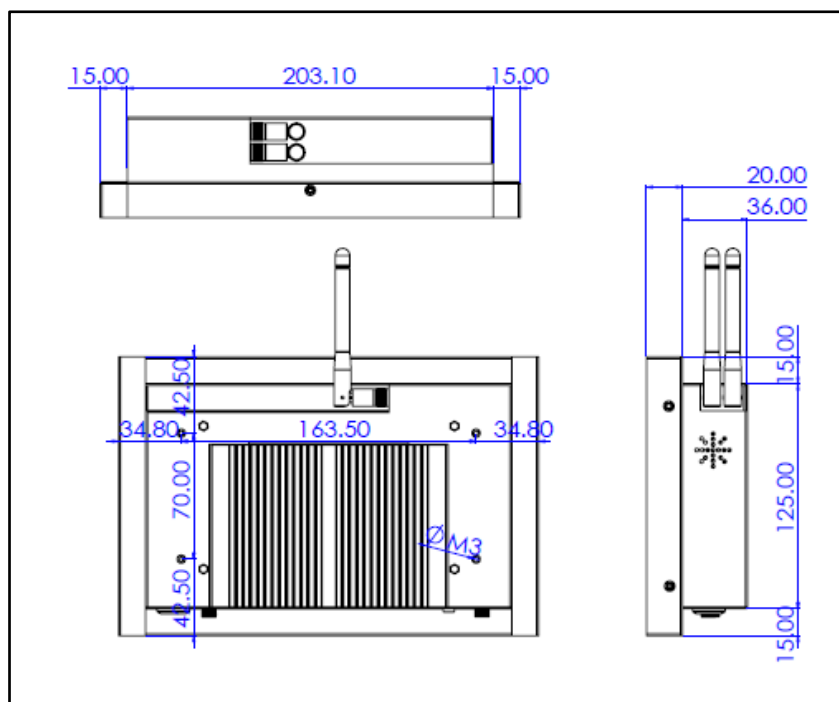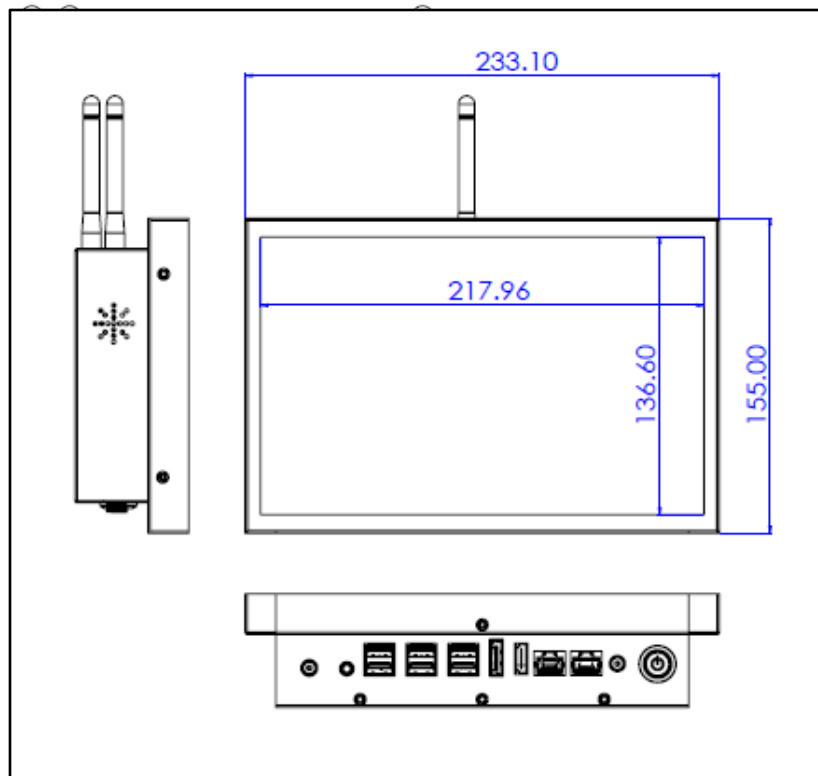


Cosmetic Inspection Criteria

Display Area Defect Criteria			
Defect Description	Defect Criteria	Acceptance	Remarks
Dot Defects (dark dot, particles, bubbles, pits, dust, and foreign matter)	$D \leq 0.2\text{mm}$	Ignored	D=Diameter
	$0.2 < D \leq 0.7\text{mm}$	$N \leq 5$	N=Quantity
	$0.7 < D \leq 1\text{mm}$	$N \leq 3$	
	$D > 1\text{mm}$	$N \leq 0$	
Linear Defect (scratches, fluff, particles)	$W \leq 0.15\text{mm}$	Ignored	W=Width
	$0.15 < W \leq 0.5\text{mm}, L \leq 15\text{mm}$	$N \leq 2$	L=Length
	$W > 0.5\text{mm}$ or $L > 15\text{mm}$	NG	

* Visual inspection condition: 60 cm viewing distance, 90° viewing angle (front/side/back).

Front Appearance Defect Criteria (Including Coating)			
Defect Description	Defect Criteria	Acceptance	Remarks
Dot Defects (dark dot, particles, bubbles, pits, dust, and foreign matter)	$D \leq 0.7\text{mm}$	Ignored	D=Diameter
	$0.7 < D \leq 1.5\text{mm}$	$N \leq 3$	N=Quantity
	$D > 1.5\text{mm}$	$N \leq 0$	
Linear Defect (scratches, fluff, particles)	$W \leq 0.2\text{mm}, L \leq 15\text{mm}$	Ignored	W=Width, L=Length
	$0.2 < W \leq 0.7\text{mm}, L \leq 15\text{mm}$	$N \leq 1$	
	$W > 0.7\text{mm}$ or $L > 15\text{mm}$	NG	

Side / Back Appearance Defect Criteria (Including Coating)			
Defect Description	Defect Criteria	Acceptance	Remarks
Dot Defects (dark dot, particles, bubbles, pits, dust, and foreign matter)	$D \leq 1.5\text{mm}$	Ignored	D=Diameter
	$1.5 < D \leq 3\text{mm}$	$N \leq 8$	N=Quantity
	$D > 3\text{mm}$	$N \leq 2$	
Linear Defect (including scratches, fluff, particles)	$W \leq 0.8\text{mm}, L \leq 15\text{mm}$	Ignored	W=Width, L=Length
	$0.8 < W \leq 1.5\text{mm}, L \leq 15\text{mm}$	$N \leq 5$	
	$W > 1.5\text{mm}$ or $L > 15\text{mm}$	NG	



Display Area
(Red Area)



Front Appearance (Red Area)



Back Appearance