

Product Specifications

Customer	
Model Name	NTWP215 V613
Model Number	NTWP215 <u>XXSXX</u> -SI <u>XXXXXX</u> - <u>XXXX</u> -613

* X = A~Z, 0~9 (Depends on Options.)



Records of Revision			
Vision	Modifying	Old Description	New Description
v2508.1	Preliminary Specification		

Features

- ★ 21.5 inch Industrial Grade Panel, 1920x1080 (FHD) Resolution
- ★ Wide Viewing Angle Technology , 178°/178°
- ★ Intel® 13th Generation Core i Series CPU
- ★ DDR4 8G RAM, Max to 32G
- ★ GbE LAN Port x2
- ★ 128G SSD, Max to 1T
- ★ Realtek Audio HAD Codec,
- ★ RS485 Port x1, RS232 Port x6
- ★ USB 3.0 x6
- ★ Narrow Bezel, True Flat Projected Capacitive Touch Screen
- ★ 7H Hardness Tempered Cover Glass
- ★ 10 points Multi-touch, Supports NEXTECH Dedicated Stylus
- ★ Metal Cabinet with Diverse Combine Options
- ★ Made in Taiwan, 3 Years Warranty
- ★ Optional High Brightness 1500nits, for Outdoor Environment
- ★ Optional Anti-Glare&UV/Antibacterial/Privacy Filter Surface Treatment



Desktop Stand



Wall Mounting



Open-frame Brackets



Panel Mount

System Specifications

CPU	Intel® Core i U Series Processor
Memory	DDR4 SO-DIMM, Max. Capacity 32G
Network	2 * Intel® GbE LAN Chip (10/100/1000 Mbps, RJ45)
Storage	SATA3.0 7P Connector (With 1 * SATA Power Wafer)x1 M.2 Key-M Slot (PCIe x4/ SATA, Default PCIE 4x, Support PCIe x4 NVMe, 2280) x1
Sound Chip	Realtek Audio HAD Codec
Rear I/O	HDMI x1, DP x1 RJ45 LAN Ports x2 USB 3.0 x6 RS485 x1, RS232 x6 Line-Out + MIC 2in1 3.5mm Jack x1
Operating Temp.	0~60°C
Storage Temp.	-20~75°C
Power Input	12VDC-in

Display Specifications

Screen Diagonal	546.3 mm (21.5 inch)	Display Mode	Normally Black
Display Area	476.1x267.8 mm	Backlight Unit	LED (white LED)
Resolution	1920x1080 (FHD)	Viewing Angle (L/R, U/D)	178°/178° (CR=10)
Contrast Ratio	1000:1	Response Time	14 msec.
Display Ratio	16:9	Backlight Lifetime	>30,000 Hours
Support Colors	16.7M Colors	Operating Temp.	0~50°C
Pixel Pitch	0.24795x0.24795 mm	Storage Temp.	-20~60°C

Display Options

Brightness			
	Brightness	Environment	Model Name
Standard	500nits	General	NTWP215NXXSXX-SIXXXXXX-XXXX-613
Option 1	1000nits	Outdoor Environment	NTWP215AXSXX-SIXXXXXX-XXFX-613
Option 2	1500nits	Sunlight Readable	NTWP215HX2XX-SIXXXXXX-XXFX-613 *

* Check the data sheet NTWP215-2 V613

Touch Options

Touch Screen		
	Description	Model Name
Standard	Projected Capacitive Touch	NTWP215XPSXX-SIXXXXXX-XXXX-613
Option 1	Resistive Touch	NTWP215X5SXX-SIXXXXXX-XXXX-613
Option 2	Non-Touch	NTWP215X0SXX-SIXXXXXX-XXXX-613

Projected Capacitive Touch

Allowed Touch Points	10 points	Thickness of Cover Lens	2.9±0.2mm
Transparency	≥87%	Hardness of Cover Lens	7H
Accuracy	99.00%	IK Ratings	IK07

Resistive Touch

Allowed Touch Points	1 point	Surface Treatment	Anti-glare<15%
Transparency	80%±5%	Hardness	≥3H
Precision	98.50%		

Surface Treatment		
	Description	Model Name
Standard	(none)	NTWP215XXS00-SIXXXXXX-XXXX-613
Option 1	Anti-Glare&UV Coating	NTWP215XXSGG-SIXXXXXX-XXXX-613
Option 2	Antibacterial (AB Film)	NTWP215XXSAB-SIXXXXXX-XXXX-613
Option 3	Anti-Spy (AS Film)	NTWP215XXSFF-SIXXXXXX-XXXX-613

Passive Stylus Pen (Option)	
Technology	Passive High Sensitive Knitted Wire Mesh Fiber Tip
Size of tip	6mm
Magnetic Attachment	Yes



Magnetic Attachment >

System Options

CPU		
	Item	Model Name
Standard	Core i3-1315U	NTWP215XXSXX-SI31XXX-XXXX-613
Option 1	Core i5-1335U	NTWP215XXSXX-SI 51 XXX-XXXX-613
Option 2	Core i7-1355U	NTWP215XXSXX-SI 71 XXX-XXXX-613

Memory		
	Item	Model Name
Standard	DDR4 SO-DIMM 8G	NTWP215XXSXX-SIXX8XX-XXXX-613
Option 1	DDR4 SO-DIMM 16G	NTWP215XXSXX-SI XXA XX-XXXX-613
Option 2	DDR4 SO-DIMM 32G	NTWP215XXSXX-SI XXB XX-XXXX-613
Option 3	DDR4 SO-DIMM 64G	NTWP215XXSXX-SI XXC XX-XXXX-613

Storage		
	Item	Model Name
Standard	SSD 128G	NTWP215XXSXX-SIXXXS1-XXXX-613
Option 1	SSD 256G	NTWP215XXSXX-SI XXXS2 -XXXX-613
Option 2	SSD 512G	NTWP215XXSXX-SI XXXS3 -XXXX-613
Option 3	SSD 1T	NTWP215XXSXX-SI XXXH1 -XXXX-613
Option 4	SSD 128G + SATA HDD 1T	NTWP215XXSXX-SI XXXSH -XXXX-613

System Options (Continued)

Material of Cabinet		
	Description	Model Name
Standard	SECC	NTWP215XXSXX-SIXXXXXX-<u>S</u>XXX-613
Option 1	Stainless Steel	NTWP215XXSXX-SIXXXXXX- <u>L</u> XXX-613
Option 2	Aluminum	NTWP215XXSXX-SIXXXXXX- <u>A</u> XXX-613

Color of Cabinet		
	Description	Model Name
Standard	Silver	NTWP215XXSXX-SIXXXXXX-<u>X</u>SXX-613
Option 1	White	NTWP215XXSXX-SIXXXXXX- <u>X</u> WXX-613
Option 2	Black	NTWP215XXSXX-SIXXXXXX- <u>X</u> BXX-613
Options	Other Colors	NTWP215XXSXX-SIXXXXXX- <u>X</u> XXX-613

* X = A~Z, 0~9 (Depends on Color)

Cooling Fan		
	Description	Model Name
Standard	Fanless	NTWP215XXSXX-SIXXXXXX-XX<u>0</u>X-613
Option	7 Blades/4000r.p.m/28.3dB	NTWP215XXSXX-SIXXXXXX-XX <u>F</u> X-613

Power Input		
	Description	Model Name
Standard	9~24DC-in, with AC/DC Adapter	NTWP215XXSXX-SIXXXXXX-XXX<u>2</u>-613
Option	100~240V AC, C14 AC Power Socket	NTWP215XXSXX-SIXXXXXX-XXX <u>A</u> -613




DC-in




AC-in

Input /Output System

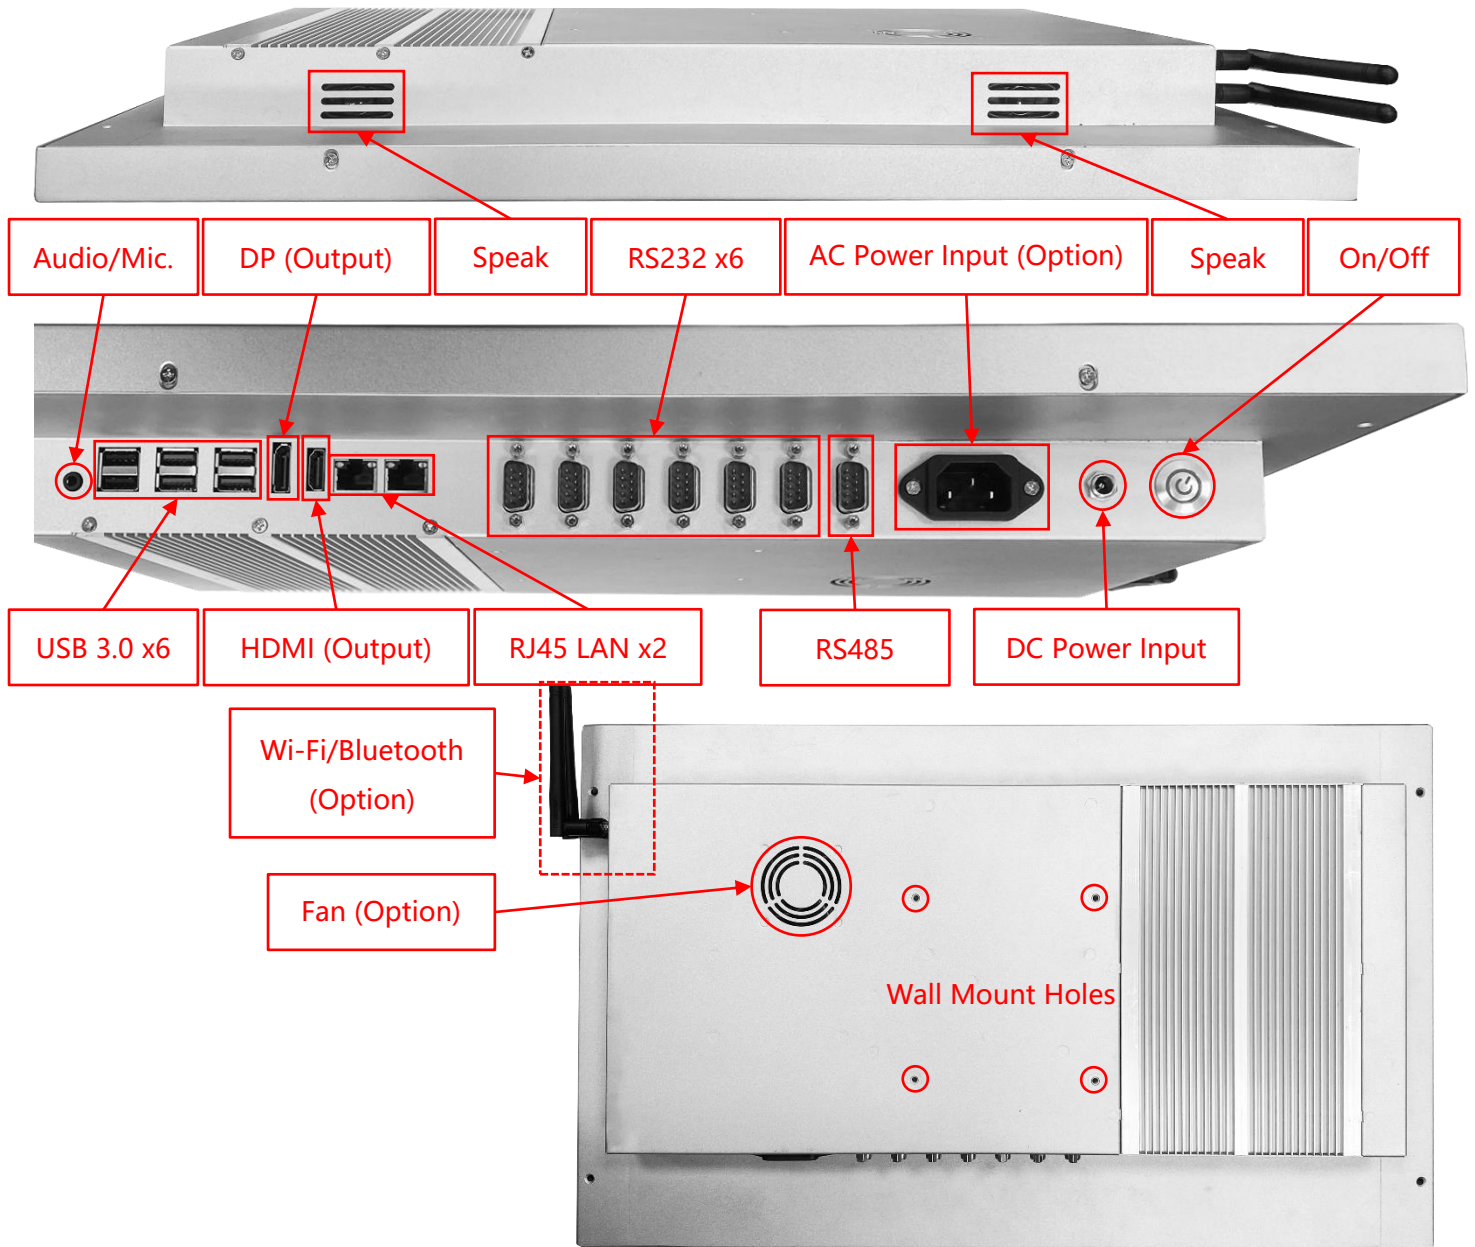

Input / Output	Connectors	Input / Output	Connectors
HDMI (Output)	1	Analog Audio Out/Mic. in	1
DP (Output)	1	Speakers	2W x2
USB 3.0	6	DC Power Input	1
RS485	1	AC Power Input	Option
RS232	6	Wi-Fi/Bluetooth & Antenna	Option
LAN (RJ45)	2		

Front Cover (Option)

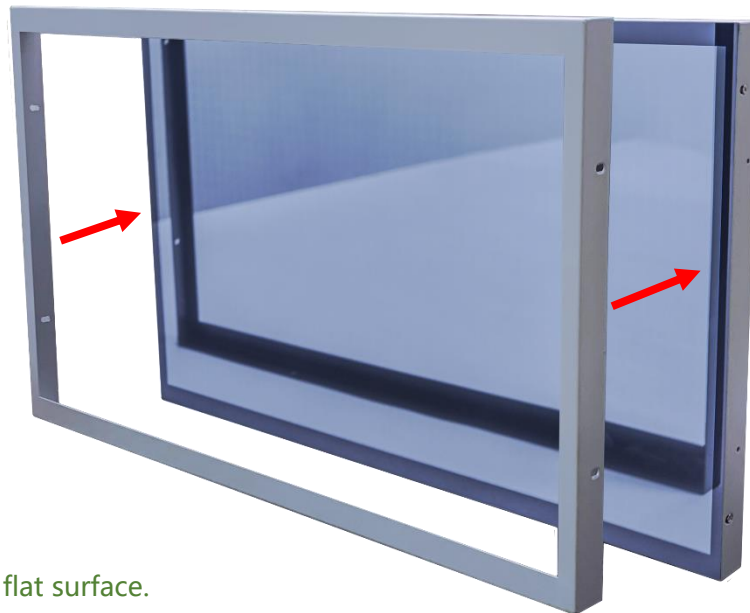


The standard **NTWP215** is true flat surface.


To protect the corners of the touch screen, the Front Cover can be added.



The watertight gasket can be added between the Front Cover and **NTWP215**.

It complies **IP65** on front.

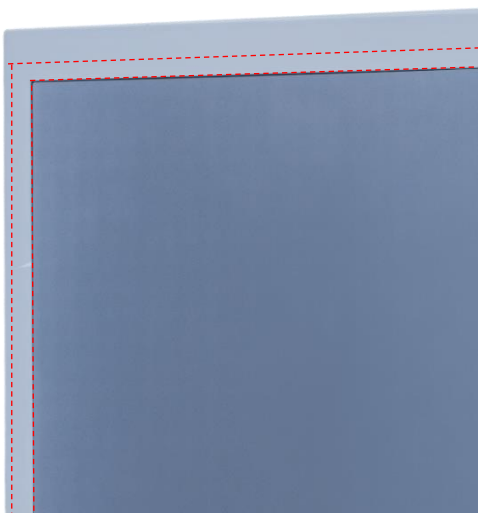

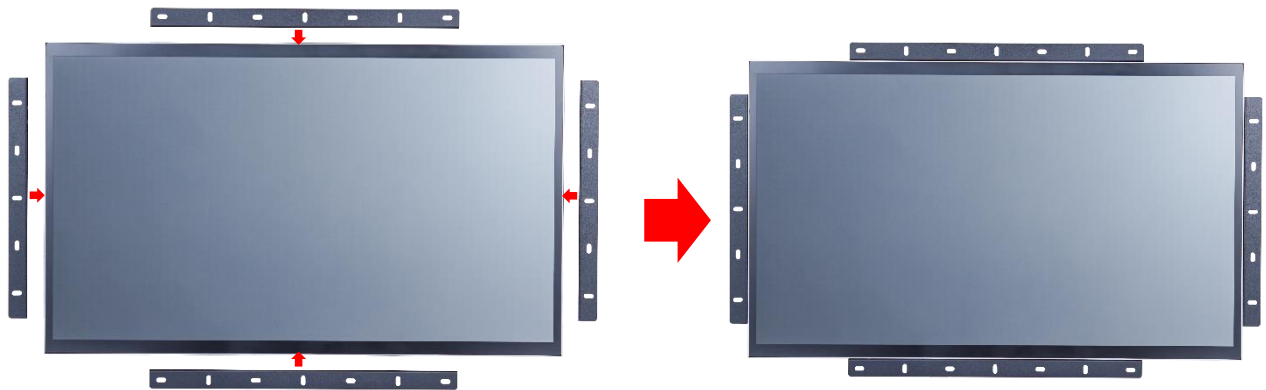


Technical drawing of a rectangular box, showing three views: front, side, and top. The drawing includes dimensions in millimeters (mm) and internal components.

Front View (Top): Shows the top of the box with dimensions: 31.55, 438.11, 31.55, 25.30, 19.80, 540.81, 501.21, 325.00, 7.50, 100.00, 100.00, 6.25, 4.50, 26.50, 477.44, 268.91, 100.00, 100.00, 7.50, 253.00, 304.90, 344.90, and 4.50.


Side View (Middle): Shows the side of the box with dimensions: 21.00, 35.00, 40.20, 202.20, 62.50, 29.00, and 20.00.


Top View (Bottom): Shows the bottom of the box with dimensions: 200.60, 102.45, 100.00, 102.45, 200.60, and a circular feature with diameter $\varnothing 4.10$.

Panel Mount Kits (Option)

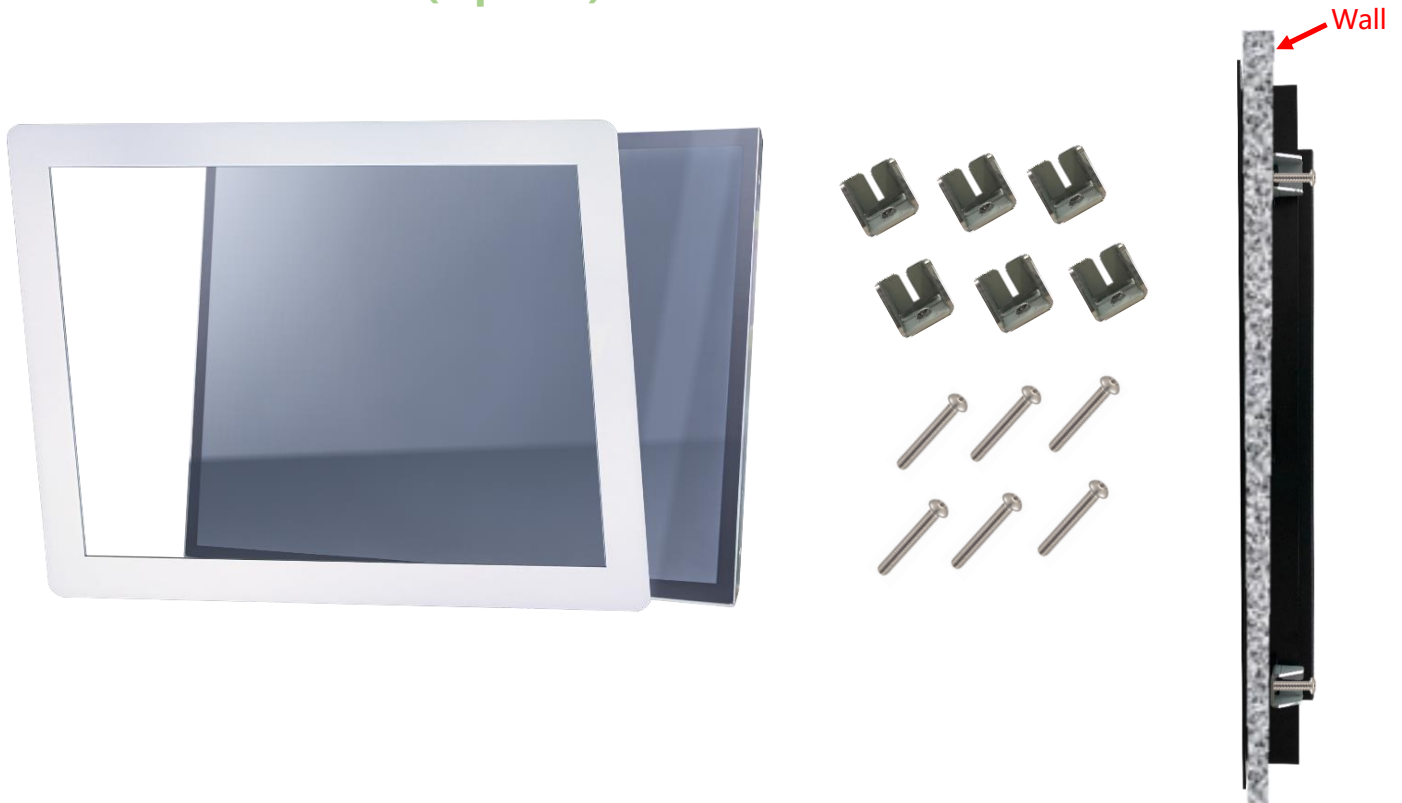


Dimension for Installing with Panel Mount Kits

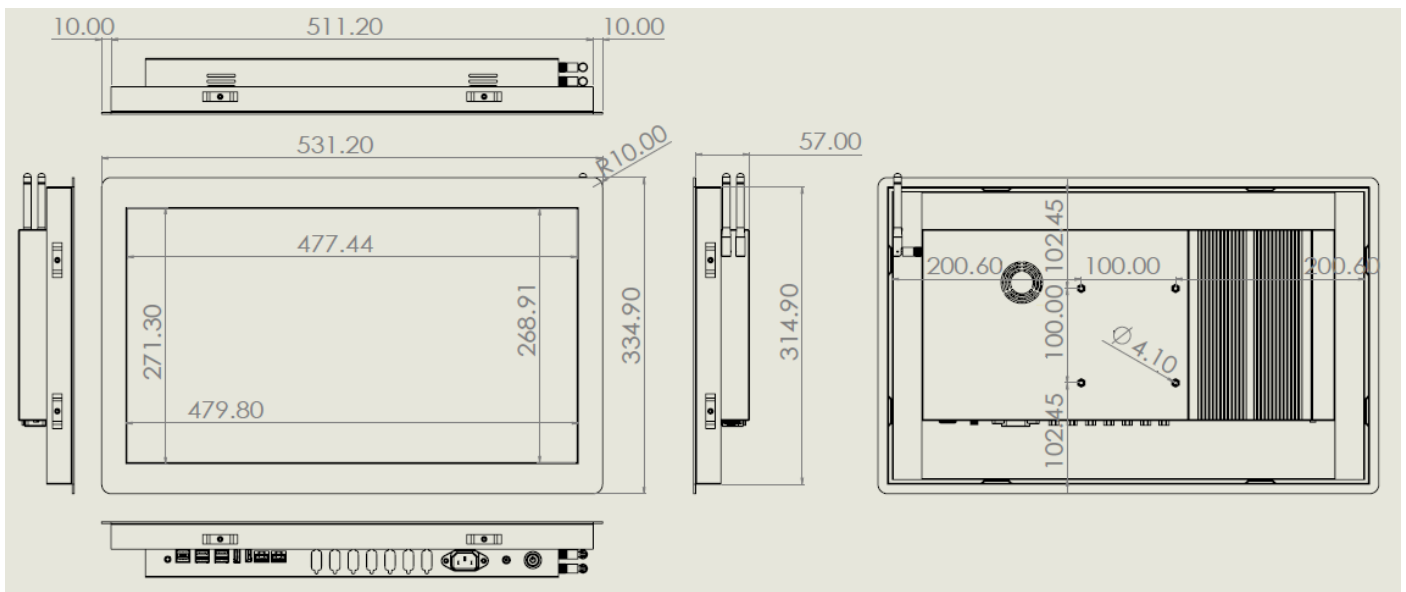


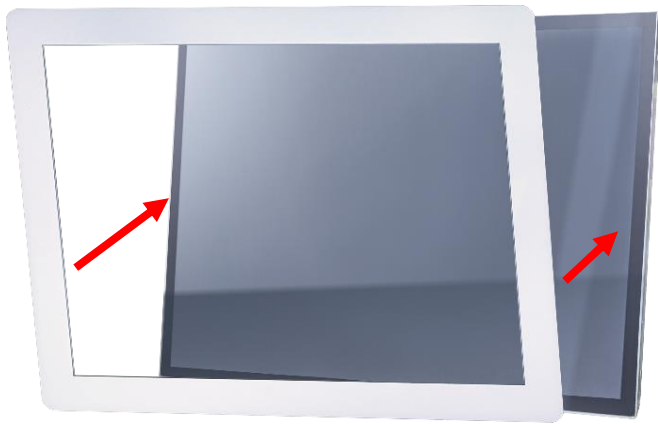

Step 1: Assemble the front module with the screen body. (This step is pre-assembled at the factory.)

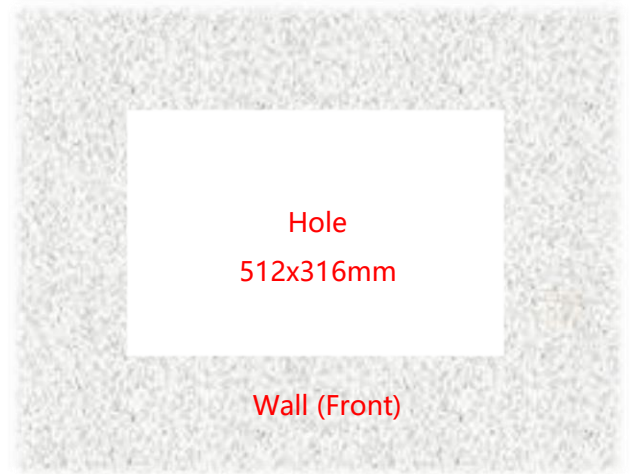

Step 2: Insert the screen from the front into the pre-cut opening.

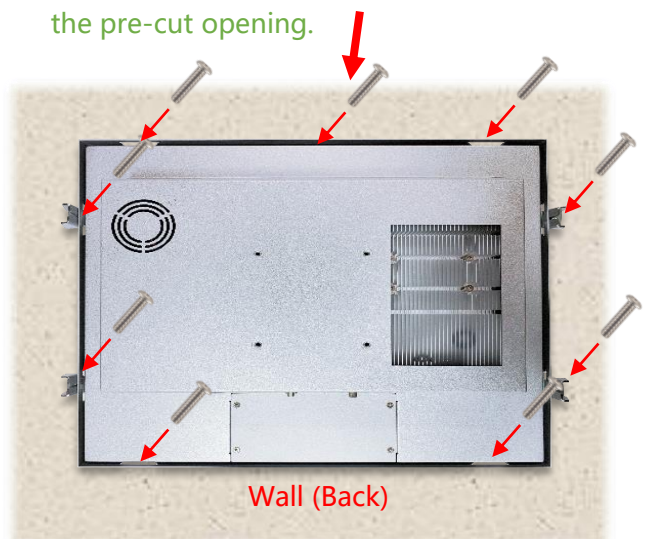

Step 3: Attach the clips from the back and secure with screws. (Up to 10 clips can be installed as needed or per positional limitations.)

Desktop Stand (Option)





Item	B Stand	Part No.	DST-0B002/DST-1B002
Mounting Pattern	100x100 / 75x75 mm	Dimension (WxHxD)	203x275x227 mm
Material	Steel/Plastic/Aluminum	Net Weight	1.8 KG
Tilt (Hinge)	-2° ~ +180°	Support Max. Weight	15 KG



Item	Z Stand	Part No.	DST-0BZ01/DST-1BZ01
Mounting Pattern	100x100 / 75x75 mm	Dimension (WxHxD)	190x240x41.6
Material	SECC	Net Weight	2.6 KG
Tilt (Hinge)	±360°	Support Max. Weight	15 KG



Wall Mount Bracket (Option)

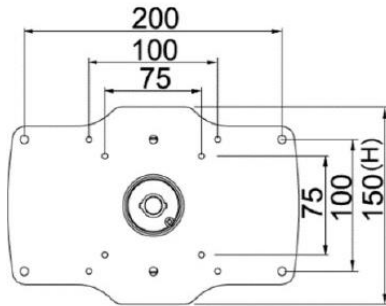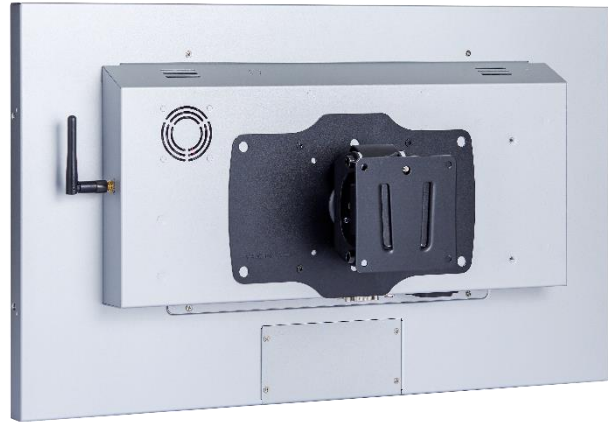



Packing Information



Unit Carton Size	670x155x445 mm
Unit N. Weight	≤5.7KG
Unit G. Weight	≤7.5KG
Units per Pallet	30 units
Pallet Size	120x100x147 CM

Physical Specifications

Dimension	501.21x304.9x56(±2)mm	Net Weight	≤5.7KG
VESA Mounting	100x100 mm	Gross Weight	≤7.5KG

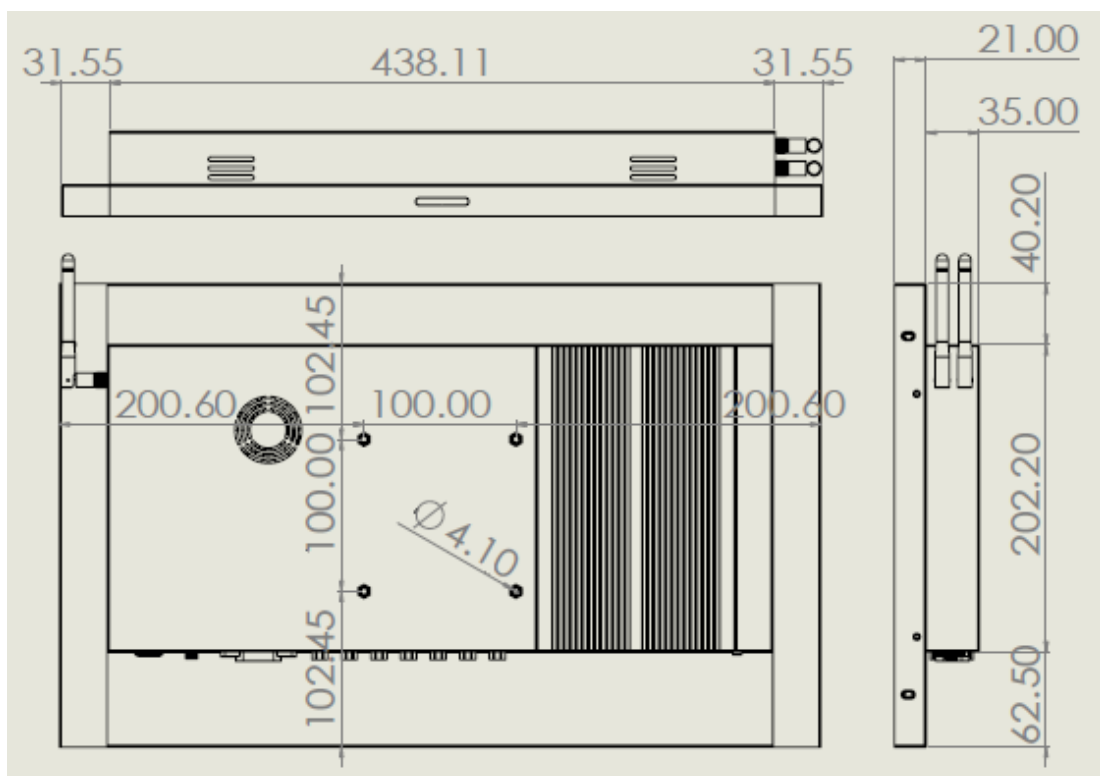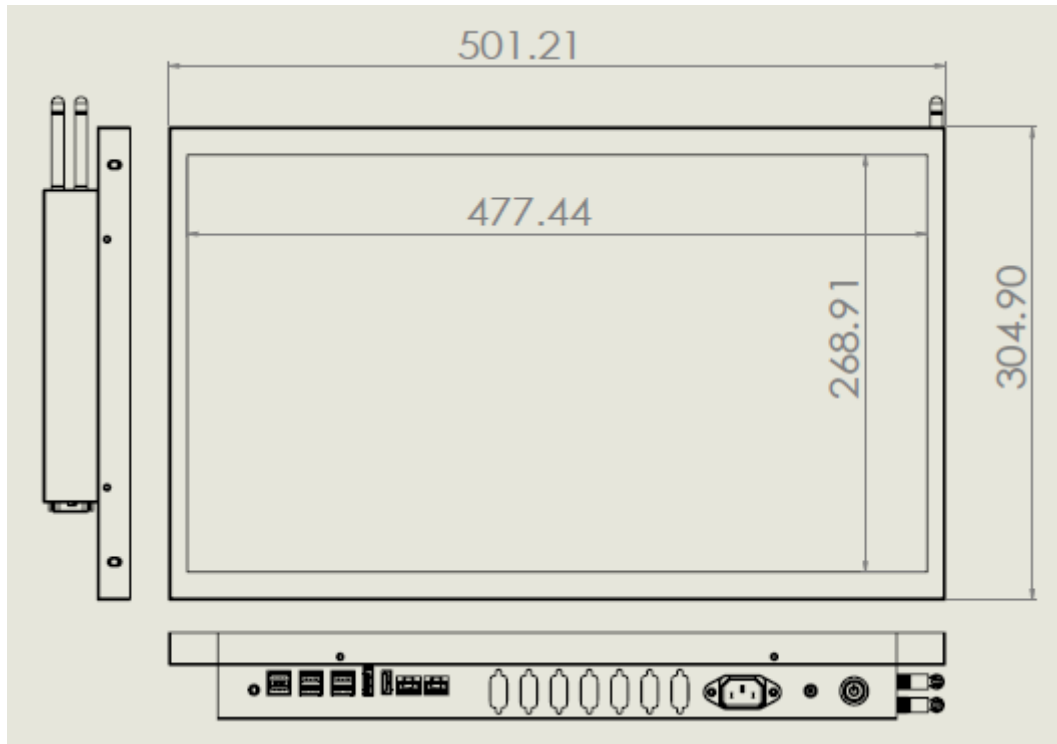

Cosmetic Inspection Standard

Display Area Allowance			
Defect description	Defective Specifications	Allowance	Remarks
Dot Defect (including dark dot, particles, bubbles, pits, dust, foreign matter)	$D \leq 0.2\text{mm}$	Ignored	D=Diameter
	$0.2 < D \leq 0.7\text{mm}$	$N \leq 5$	N=Quantity
	$0.7 < D \leq 1\text{mm}$	$N \leq 3$	
	$D > 1\text{mm}$	$N \leq 0$	
Linear Defect (including scratches, fluff, particles)	$W \leq 0.15\text{mm}$	Ignored	W=Width
	$0.15 < W \leq 0.5\text{mm}, L \leq 15\text{mm}$	$N \leq 2$	L=Length
	$W > 0.5\text{mm}$ or $L > 15\text{mm}$	NG	

* Visual inspection distance: 60cm, 90 degree (same for front/side/back)

Front Appearance Allowance (Including Coating)			
Defect description	Defective Specifications	Allowance	Remarks
Dot Defect (including particles, bubbles, pits...etc.)	$D \leq 0.7\text{mm}$	Ignored	D=Diameter
	$0.7 < D \leq 1.5\text{mm}$	$N \leq 3$	N=Quantity
	$D > 1.5\text{mm}$	$N \leq 0$	
Linear Defect (including scratches, fluff, particles)	$W \leq 0.2\text{mm}, L \leq 15\text{mm}$	Ignored	W=Width, L=Length
	$0.2 < W \leq 0.7\text{mm}, L \leq 15\text{mm}$	$N \leq 1$	
	$W > 0.7\text{mm}$ or $L > 15\text{mm}$	NG	

Side / Back Appearance Allowance (Including Coating)			
Defect description	Defective Specifications	Allowance	Remarks
Dot Defect (including particles, bubbles, pits...etc.)	$D \leq 1.5\text{mm}$	Ignored	D=Diameter
	$1.5 < D \leq 3\text{mm}$	$N \leq 8$	N=Quantity
	$D > 3\text{mm}$	$N \leq 2$	
Linear Defect (including scratches, fluff, particles)	$W \leq 0.8\text{mm}, L \leq 15\text{mm}$	Ignored	W=Width, L=Length
	$0.8 < W \leq 1.5\text{mm}, L \leq 15\text{mm}$	$N \leq 5$	
	$W > 1.5\text{mm}$ or $L > 15\text{mm}$	NG	



Display Area
(Red Area)



Front Appearance (Red Area)



Back Appearance